



# Triple Pull Up Bar

## TG0503



This unit will be popular amongst those users looking to build up their upper body strength (especially their shoulders, arms and back).

### Specification

1. 100% Made in Britain
2. Certified to EN16630, (legacy standards, BSI PAS888 - safety compliant for ALL ages, users and non-users & DIN79000 - safety compliant for users, aged 14+). All TGO outdoor gym equipment is free from exposed end stops, entrapments, sharp edges and crush points

**ALWAYS ASK FOR EN16630 FOR OUTDOOR GYMS**

3. Weatherproof
4. Low maintenance
5. Designs include key elements of Inclusive Fitness Initiative guidelines
6. TGO plant a tree in the NHS Forest for every piece of equipment sold
7. Anti vandal fixings
8. Available in all major RAL colours
9. Paint UV stabilised
10. Welds certified to EN15015614
11. Powder coated finish

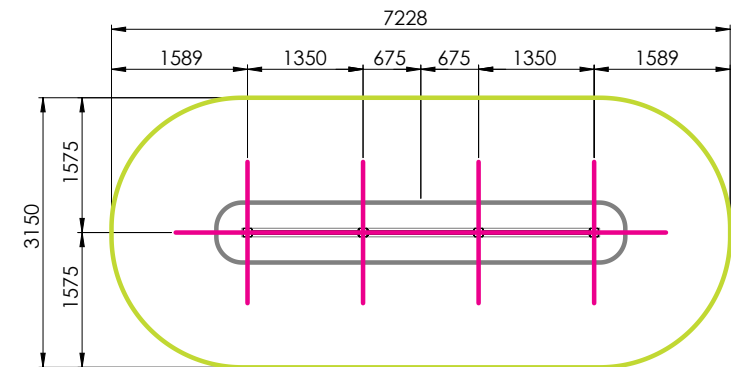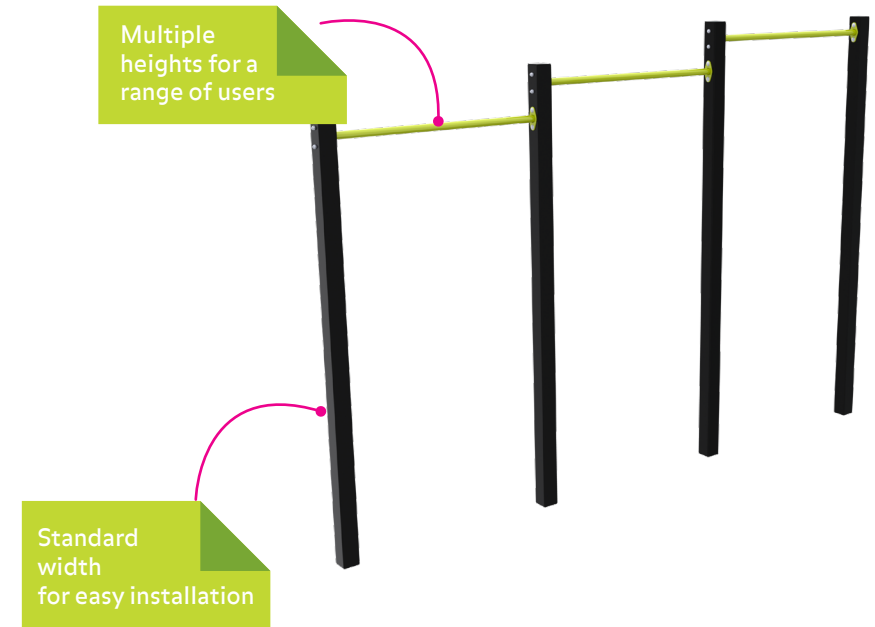

Clear Space Required  Recommended Surfacing  Base Plate & Centre Lines   
 (25mm tolerance added in each direction)

**Guarantees**  
 25 years steel work  
 2 years bearings  
 5 years paint





# Triple Pull Up Bar

## TGO503

### Production Details

Manufacturer Standard: EN16630 (legacy standards - PAS888, Din79000)  
 Framework: Mild Steel Grade S275  
 Finish: E coat primer then High quality gloss finish polyester powder coat paint

### Enhanced Corrosion Protection

An enhanced corrosion protection is available on request for this product. Hot dip galvanising is the process TGO use to add a protective coating to the body of our products on our equipment in coastal areas, which have higher air salinity or in harsh urban and industrial atmospheres with higher sulphur dioxide pollution\*.

The upgrade includes:

- Upgrading to hot dip galvanising
- Fixings are upgraded from A2 to A4 stainless steel

\*An upgrade to galvanised steel will be necessary for the warranty in these environments.

### Installation

This product is installed 800mm directly into the ground. Please refer to the diagram opposite for safety spacing.

### Safety


This product requires 1.5m of clear space around the equipment (green outline).

- Falling height: 0.95m
- Clear Space: 21m<sup>2</sup>

There is no safer surface requirement and therefore TGO only recommend a minimal surface area (grey outline).

### Parts List

No	Part	Dimensions	Weight	Qty
1	Upright Post- Single 2.8	L100, W100, H2660	34.2 kg	1
2	Upright Post- Double 2.6	L100, W100, H2862	31.1 kg	1
3	Upright Post- Double 2.8	L100, W100, H2860	34.4 kg	1
4	Upright Post- Single 2.4	L100, W100, H2460	29.6 kg	1
5	Single Pull Up Bar	L1250, W66, H135	4.1 kg	3

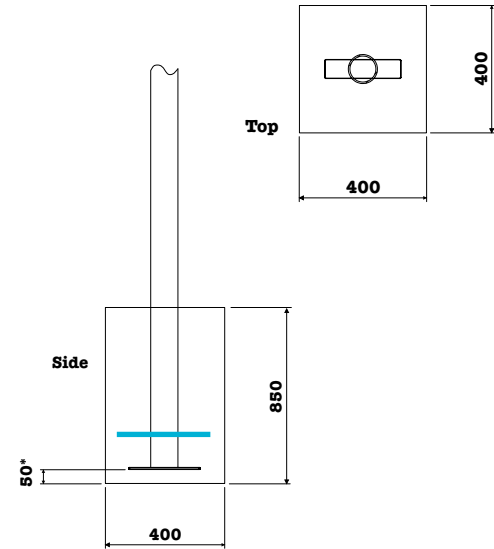

### TGO static post range pad size:

The TGO static post range includes TGO501, TGO502, TGO503, TGO504 and TGO505. New products could be added to this range, always refer to the product cards for more details.

The dimensions given are the minimum requirement for regular ground conditions & may need to be amended for made up or soft ground.

TGO have identified that this product can all be installed using a 400mm x 400mm x 850mm concrete pad, located centrally about the Post.

### NOTE:

There is no surface mounting option for the static post range. \*A paving slab can be used to provide a firm and stable base for positioning the post.

